Philips
PAL coax cable

3 m

White Ferrite core

SWV2916W

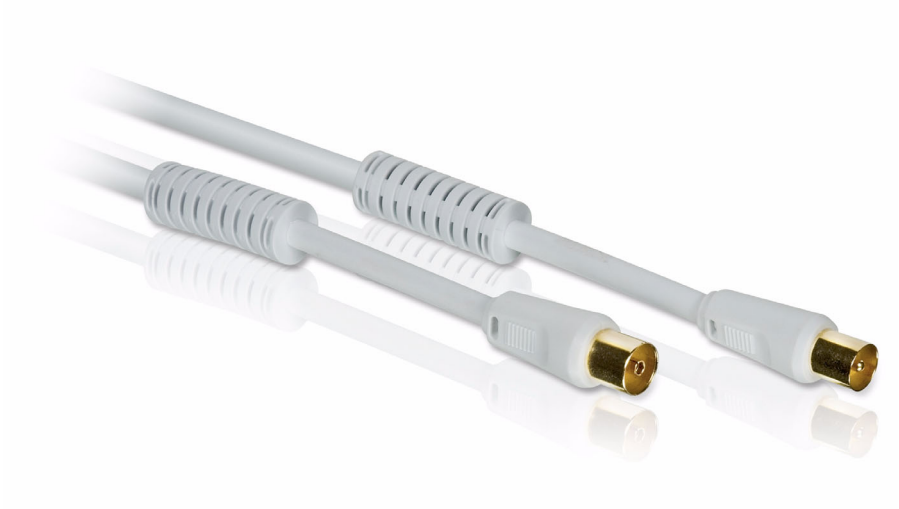

Ensure a reliable connection

with this PAL coax cable

Depend on this cable to provide you with a reliable audio/video connection between components.

Enjoy good picture quality
- Gold-plated connectors for better conductivity

Enjoy good audio quality
- High purity copper conductor for reliable signal transfer

Protects against signal loss
- Bare copper shielding

Easy installation
- Non-slip ergonomic grip for easy use

Enjoy extended durability
- Molded plug for secure connections
- Flexible PVC jacket
- Rubber strain relief

PHILIPS

sense and simplicity

PAL coax cable
3 m White Ferrite core

SWV2916W/10

Specifications

Packaging dimensions
- Packaging dimensions (W x H x D): 9.4 x 23.6 x 3.6 cm
- Nett weight: 0.168 kg
- Gross weight: 0.190 kg
- Tare weight: 0.022 kg
- EAN: 87 12581 38025 0
- Number of products included: 1
- Packaging type: Blister

Outer Carton
- Outer carton (L x W x H): 33.0 x 25.7 x 17.8 cm
- Nett weight: 2.016 kg
- Gross weight: 2.780 kg
- Tare weight: 0.764 kg
- EAN: 87 12581 38027 4
- Number of consumer packagings: 12

Inner Carton
- Inner carton (L x W x H): 24.4 x 10.4 x 16.0 cm
- Nett weight: 0.672 kg
- Gross weight: 0.840 kg
- Tare weight: 0.168 kg
- EAN: 87 12581 38026 7
- Number of consumer packagings: 4

Product highlights

Bare copper shielding
Bare copper shielding protects against signal loss.

Easy grip
This non-slip grip makes connecting your components easy and ergonomically comfortable.

Flexible PVC Jacket
Flexible PVC jacket provided protection to the delicate core of the cable. It also offers extended durability and ease of installation.

High purity copper
This copper conductor provides high accuracy in signal transfer with minimal resistance.

Molded plug
Molded plugs ensure secure connections between components and offer extended durability.

Rubber strain relief
Rubber strain relief provides a secure, yet flexible juncture between the cable and the plug.

Gold-plated connectors
Gold-plated connectors provide better conductivity by lowering contact resistance. They also prevent connector deterioration through oxidation.

Issue date 2008-10-28
Version: 1.2.8
12 NC: 8670 000 35461
EAN: 87 12581 38025 0

© 2008 Koninklijke Philips Electronics N.V.
All Rights reserved.
Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

www.philips.com